


# Xtreme Kit

The most complete professional self-protection equipment.

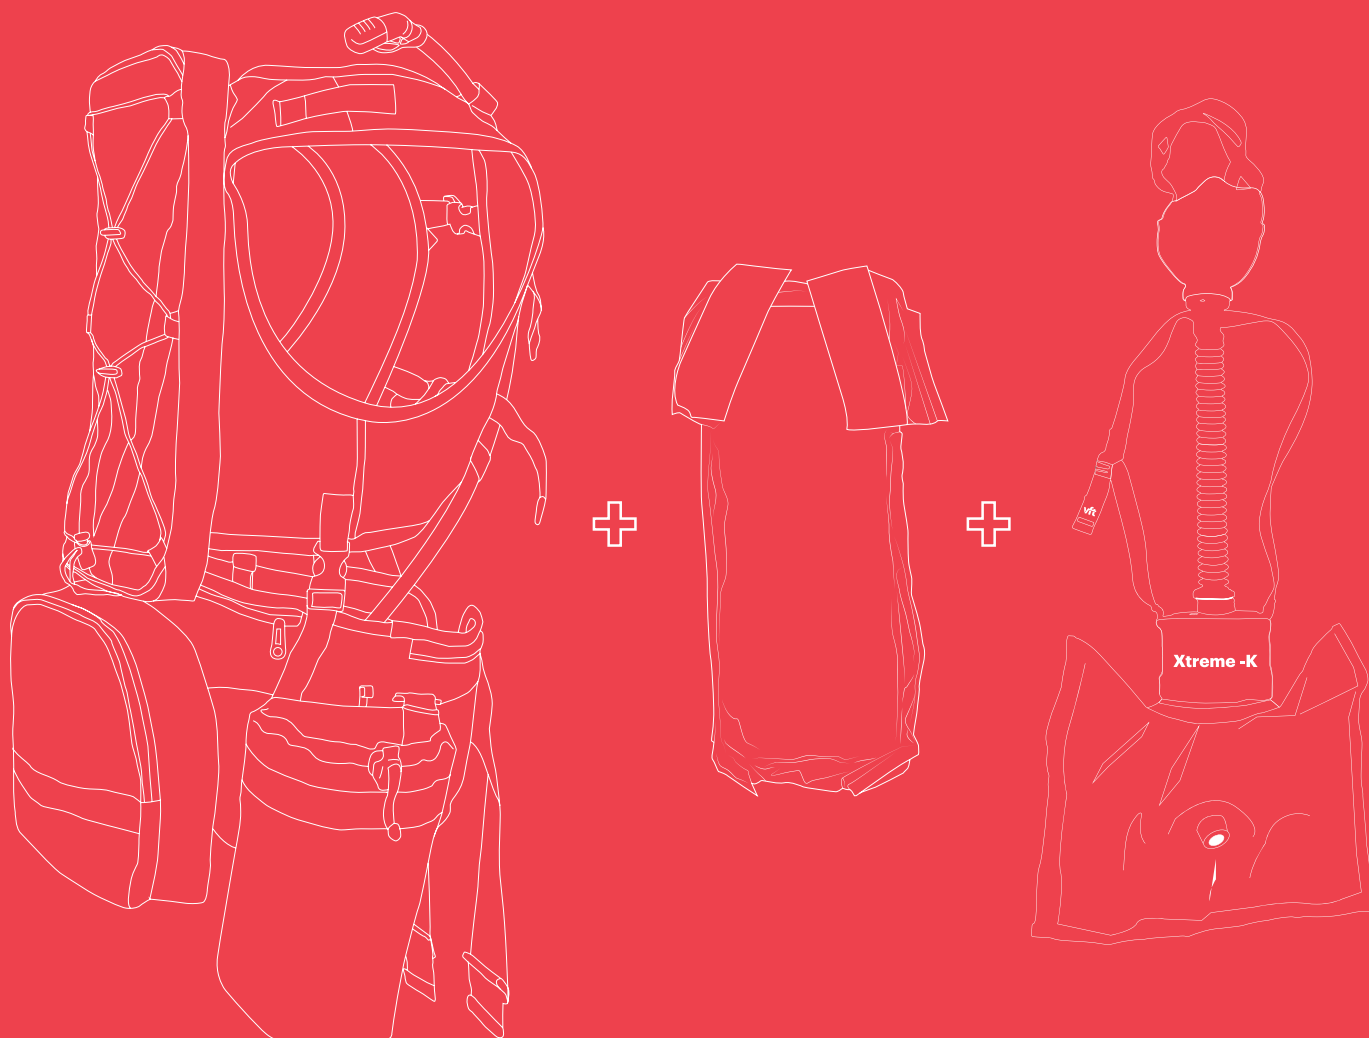

# Xtreme Kit

The **Xtreme Kit** is a set of 3 products designed as just one to create a kit offering wildland firefighters complete self-protection in the event of entrapment.

## Aims

- To improve efficiency. A versatile backpack capable of adapting to the unique characteristics of each type of ground and each user (technicians, captains and/or laborers).
- To increase safety.
- To protect the skin and respiratory tract in the event of entrapment.

## What's included?



# Xtreme Pack

The **Xtreme Pack** features an ergonomic and breathable harness which distributes the weight of the different elements in an optimal manner over the firefighter's torso. The design offers complete freedom of movement for agile work using manual tools. The belt has an integrated 2.8 liter hydration system and features the Molle System which helps arrange the accessories each user needs.

## Xtreme Pack Features

Weight	1.25 kg
Harness size	S-M and L-XL
Hydration system	2.8 l   Approved by the FDA; PVC and BPA-free.
Materials	1000 Cordura and breathable mesh.



# Xtreme Shelter XS 17

A fireproof shelter for entrapment situations during wildland fires with a multi-layer composition and a high level of insulation to radiation, convection and contact. A design based on use in a fetal position to increase the protection for the vital organs and reduce the volume and weight of the equipment during transport.

## Xtreme Shelter XS 17 Features

Weight	1.35 kg
Dimensions when folded	39 x 17 x 6 cm
Fabric-related standards	EN ISO 9151:2008   EN ISO 11612:2008 EN ISO 6942:2002   Levels A1, B1, C4.



# Xtreme - K

**Xtreme-K** is a closed-circuit disposable limited Chemical Oxygen generator for respiratory tract protection in emergencies or entrapment situations. This survival device offers no less than 30 minutes of autonomy.

The Xtreme-K requires no maintenance and is highly resistant to high temperatures.

## Xtreme - K Features

Weight	1500 ± 50 gr.
Autonomy	no less than 30 minutes.
Standard	EN 13794:2002



Any questions? Contact us: [clientes@vallfirest.com](mailto:clientes@vallfirest.com) | T. +34 938 678 779