




Engineered
Quality

multi-purpose pump NP 4 L

Wastewater · 1~ 230 V 50 Hz

230 V

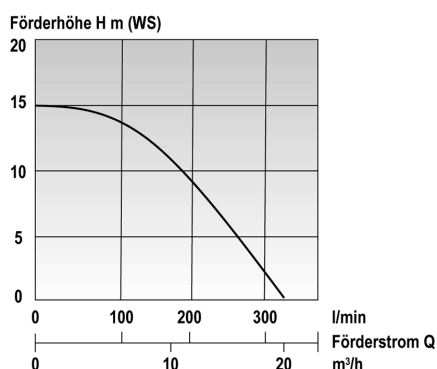

Delivery rate Q l/min	320	270	190	150	0
Delivery height H m (WC)	0	5	10	12	15

SPECIFICS

- Self-priming from 8,4 m
- maintenance-free
- dry-running safe
- Couplings TW-brass style (VK/MK 50) on request

RANGE OF USE

Self-priming centrifugal pump applicable for wastewater, light fuel oil, Diesel fuel, and other non-aggressive liquids.

temperature of medium to be pumped max: 100 °C

density of medium max: 1.1 kg/dm³

pH value min: 5

pH value max: 8

TECHNICAL SPECIFICATIONS

Engine: 1~ 230 V AC

engine power P1: 0.75 kW

Rated current: 5.4 A

weight: 26 kg

Height H (max.): 15 m

Rate Q (max.): 320 l/min

companion dimensions: G 2"

Solids passage: 8 mm

connecting bend: Oilflex 540P 3G1,5 (1,5 m)

connecting plug: Schuko-CEE 7/4 (type F) rubber plug with overload protection up to 16A, IPX4

MATERIALS

carrying handle: Coated Steel

pump body: Aluminium alloy acc. to DIN EN 1706*

blade wheel: Special cast iron acc. to DIN EN 1561

control device: Special cast iron acc. to DIN EN 1561

seals: Mineraloil resistant rubber

: Face seal carbon / carbid