




Engineered
Quality

submersible pump T 6 L

Wastewater · 1~ 230 V 50 Hz

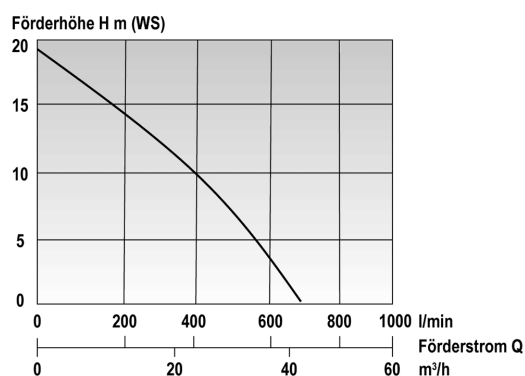

RANGE OF USE

wastewater

retraction depth max: 20 m

temperature of medium to be pumped max: 60 °C

density of medium max: 1.1 kg/dm³

pH value min: 5

pH value max: 8

TECHNICAL SPECIFICATIONS

Engine: 1 ~ 230 V AC

engine power P1: 1.6 kW

Rated current: 8.1 A

weight: 21 kg

Height H (max.): 18 m

Rate Q (max.): 660 l/min

companion dimensions: G 2"

STORZ - coupler: C

Solids passage: 8 mm

connecting bend: H 07 RN-F 4 G 1,5 (20 m)

connecting plug: Schuko CEE 7/4 (type F), IP 44

Delivery rate Q l/min	660	560	400	160	0
Delivery height H m (WC)	0	5	10	15	18

SPECIFICS

- standard flat suction appliance
- Hot water up to 90°C on request
- Float switch, built-in or connectable, on request
- With STORZ B-coupling on suction side for tandem use on request
- maintenance-free
- dry-running safe
- without oil-cage
- capsuled electric motor

MATERIALS

carrying handle: Coated steel

crankcase: Aluminium alloy acc. to DIN EN 1706*

pump body: PVC-U

: Stainless steel

base plate: Aluminium alloy acc. to DIN 1706*

rotor shaft: Stainless steel 1.4021

blade wheel: Special cast iron acc. to DIN EN 1561

control device: Special cast iron acc. to DIN EN 1561

screws: Stainless steel A2

seals: Mineraloil resistant rubber

: Face seal carbon / carbid